

Relative, and differential pressure transmitter type 699

Pressure range

-1 ... 1 mbar / 0 ... 0.3 – 50 mbar



The type 699 transmitters are available in switchable pressure ranges and with or without display. The full-version includes customer specific adjustment possibilities. Especially developed sensors for each pressure range ensure accurate long term stable measurement and the large variety of options provide the perfect platform for use in air conditioning technology as well as for fine measurement in the industrial and medical environment.

- Fast, easy mounting. Housing incorporates integral bracket for wall or ceiling mounting
- Available with or without LCD display
- Adjustable measurement range
- Switchable output signals
- Switchable response curve (linear or root-extracted)
- Resettable Zero Point (Reset button)
- Full scale adjustable
- Attractive price / performance ratio
- Application at over and low pressure range possible

Technical overview

Pressure range

Relative and differential	-1 ... 1 mbar / 0 ... 0.3 – 50 mbar
---------------------------	-------------------------------------

Operating conditions

Medium		Air and neutral gases		
Temperature		Medium / ambient	0 ... +70 °C	
		Storage	-10 ... +70 °C	
		No condensation		
Tolerable overload on one side	Application at over pressure range	≤ 3 mbar	P1 = 50 mbar	P2 = 4 mbar
		> 3 mbar	P1 = 100 mbar	P2 = 4 mbar
	Application at under pressure range	≤ 3 mbar	P1 = -4 mbar	P2 = -50 mbar
		> 3 mbar	P1 = -4 mbar	P2 = -100 mbar
Rupture pressure	ambient temperature		2 x overload	
	70 °C		1.5 x overload	

Materials in contact with medium

Sensor	Ceramic Al ₂ O ₃ (96%)
Diaphragm	Silicone
Housing	Polycarbonat PC

Electrical overview

	Output ¹⁾	Power supply ¹⁾	Load	Current consumption ²⁾
2 wire	4 ... 20 mA	8.0 ... 33 VDC	< $\frac{\text{supply voltage} - 8 \text{ V}}{0.02 \text{ A}}$ [Ohm]	< 20 mA
	0 ... 10 V	13.5 ... 33 VDC / 24 VAC ±15%	> 10 kOhm	< 10 mA
3 wire	0 ... 20 mA	13.5 ... 33 VDC / 24 VAC ±15%	< 500 Ohm	< 30 mA
	4 ... 20 mA	13.5 ... 33 VDC / 24 VAC ±15%	< 500 Ohm	< 30 mA
	0 ... 5 V ³⁾	6.5 ... 33 VDC / 24 VAC ±15%	> 10 kOhm	< 10 mA
Filter			Response time switchable by	off / 0.2s / 1s / 5s / 20s
Polarity reversal protection	Short circuit proof and protected against polarity reversal. Each connection is protected against crossover up to max. supply voltage.			

Dynamic response

Response time	< 20 ms
Load cycle	< 10 Hz

Protection standard

Without cover	IP 00
With cover	IP 54
	IP 65

Display

LCD Display	Double spaced	per 8 digit alphanumeric
Module MODBUS	At additional backlight LCD-Display 30 mA current consumption RTU RS-485	

Ranges of adjustment

The zero point is adjustable by reset button.
The Full scale is adjustable by DIP-Switch and additional by the turbopot.

Adjustability

Optional version with self configurable parameters (see order code selection table)

Electrical connection

Screw terminals for wire and stranded conductors up to 1.5 mm²
Cable gland with built-in strain relief PG11

Pressure connection

Connection pipe	Ø 6.2 mm
-----------------	----------

Mounting instructions

Installation arrangement	Recommendation:	Vertical, with pressure connections downwards
Mounting		Mounting bracket (integrated in case)

Tests / Admissions

UL	
Electromagnetic compatibility	CE-conformity acc. EN 61326-2-3

Weight

Without display	~ 90 g
With display	~ 100 g

Packaging

Single packaging in cardboard	
Multiple packaging	20 / 40 / 120

Accuracy

Parameter		Unit	±0.5 mbar	0 ... 1 mbar	0 ... 3 mbar	0 ... 5 mbar	0 ... 10 - 50 mbar
Tolerance zero point	max.	% fs	±1.0	±1.0	±0.7	±0.7	±0.7
Tolerance zero full scale	max.	% fs	±1.0	±1.0	±0.7	±0.7	±0.7
Resolution		% fs	0.2	0.2	0.1	0.1	0.1
Total of linearity, hysteresis and repeatability	max.	% fs	±1.0	±1.0	±1.0	±1.0	±0.6
Long term stability acc. to DIN EN 60770		% fs	±1.0	±1.0	±1.0	±1.0	±1.0
TC zero point ⁴⁾	typ.	% fs/10K	±0.2	±0.2	±0.2	±0.1	±0.1
TC zero point ⁴⁾	max.	% fs/10K	±1.0	±1.0	±0.5	±0.4	±0.4
TC sensitivity ⁴⁾	typ.	% fs/10K	±0.3	±0.3	±0.2	±0.1	±0.1
TC sensitivity ⁴⁾	max.	% fs/10K	±0.6	±0.6	±0.5	±0.5	±0.2

- no additional root-extracted errors

- For changing diaphragm position, compensable with zero point reset

Test conditions: 25 °C, 45% rF, Power supply 24 VDC

TC z.p. / TC z.p. 0 ... 70 °C

¹⁾ Adjustable by DIP-Switch


²⁾ At nominal pressure

³⁾ Additional adjustable by software (with LCD-Display only)

⁴⁾ TC = Temperature coefficient

		1	2	3	4	5	6	7	8	9	10
Order code selection table		699.	X	X	X	X	X	X	X	X	X
Pre-adjustment	max. range	9									
	middle range	B									
	min. range	C									
Signal range selectable	Pressure range of 0 % bis 100% fs	1									
	Pressure range of -10 % bis 90% fs	2									
	Pressure range of -100 % bis 100% fs	3									
Pressure range selectable	mbar (hPa) Pa mmWS inH ₂ O										
	0 ... 0.3/0.5 30/50 3/5 0.1/0.2 ¹⁾	0									
	0 ... 0.3/0.5/1 30/50/100 3/5/10 0.1/0.2/0.3 ²⁾	1									
	0 ... 0.5/1/3 50/100/300 5/10/30 0.3/0.5/1 ¹⁾	2									
	0 ... 1/3/5 100/300/500 10/30/50 0.5/1/2 ¹⁾	3									
	0 ... 3/5/10 300/500/1000 30/50/100 1/2/3 ¹⁾	4									
	0 ... 5/10/16 500/1000/1600 50/100/160 2/3/5 ¹⁾	5									
	0 ... 10/16/25 1000/1600/2500 100/160/250 3/5/10 ¹⁾	6									
Pressure unit	0 ... 16/25/50 1600/2500/5000 160/250/500 5/10/20 ¹⁾	7									
	mbar					0					
	hPa					4					
	Pa					2					
	kPa					5					
	mmWS					3					
Output signal / adjustment	inH ₂ O					6					
	Linear without Filter dual DIP-Switch					1		0			
	Linear with Filter (transposable) tenfold DIP-Switch					2					
	Square root extracted without Filter dual DIP-Switch					4		0			
Output / power supply	Square root extracted with Filter (transposable) tenfold DIP-Switch					3					
	0 ... 10 V 13.5 ... 33 VDC / 24 VAC ± 15 % (3 wire)							1			
	0 ... 20 mA 13.5 ... 33 VDC / 24 VAC ± 15 % (3 wire)							3			
	4 ... 20 mA 13.5 ... 33 VDC / 24 VAC ± 15 % (3 wire)							4			
	4 ... 20 mA 8.0 ... 33 VDC (2 wire)							5			
Option	Output signal complimentary selectabel, at delivery no pre-adjustment	9				2		6			
	without display								0		
	in pressure unit chosen above								1		
	in % fs								2		
Pressure connection / Pressure orifices	Module MODBUS					2.3		1		3	
	Connection pipe Ø 6.2 mm without pressure orifice									1	
	Connection pipe Ø 6.2 mm pressure orifice on P1									2	
	Connection pipe Ø 6.2 mm pressure orifice on P2									3	
	Connection pipe Ø 6.2 mm pressure orifice on P1 and P2									4	
Accessories / Connection Kit	IP 54 without										0
	IP 54 with connection kit (metal), 90° angled including tube 2 m long (Fig. 1)										1
	IP 54 with connection kit (plastic), straight including tube 2 m long (Fig. 2)										2
	IP 65 without										3
	IP 65 with connection kit (metal), 90° angled including tube 2 m long (Fig. 1)										4
	IP 65 with connection kit (plastic), straight including tube 2 m long (Fig. 2)										5
Pressure range variation	Indicate W and state range on order (e.g.: W0 ... + 8mbar/OUT1...6V)	9	1								W

Range of characteristic line

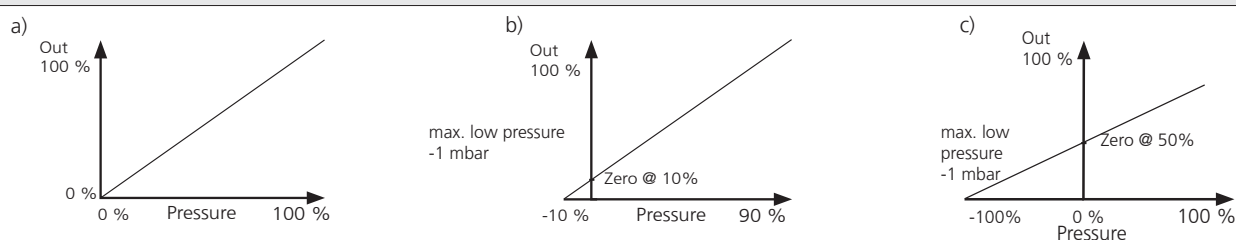

Depending on the version parameters are adjustable by customer

Version	Variable parameters
Dual DIP-Switch	Pressure ranges in grades
Tenfold DIP-Switch	Pressure ranges in grades; stepless adjustable with Turbo-Poti / output signals / filter (off / on) / response curve (linear / root extracted)
Tenfold DIP-Switch with Display	Pressure ranges in grades; stepless adjustable with Turbo-Poti / pressure units / pressure range character / output signals; additional 0 ... 5 V / filter (off / 0.2s / 1s / 5s / 20s) / response curve (linear / root extracted) / backlight (off / 5min / on)


Accessories ³⁾

		Order number
Connection kit for vent duct (metal), 90° angled	including tube 2 m long (Fig. 1)	104312
Connection kit for vent duct (plastic), straight	including tube 2 m long (Fig. 2)	100064
DIN-rail mounting adaptor (Fig. 3)		112854
Module MODBUS		117305
Calibration certificate		104551

¹⁾ minimal operating pressure = -50 Pa

²⁾ minimal operating pressure = -100 Pa

³⁾ Accessories supplied loose

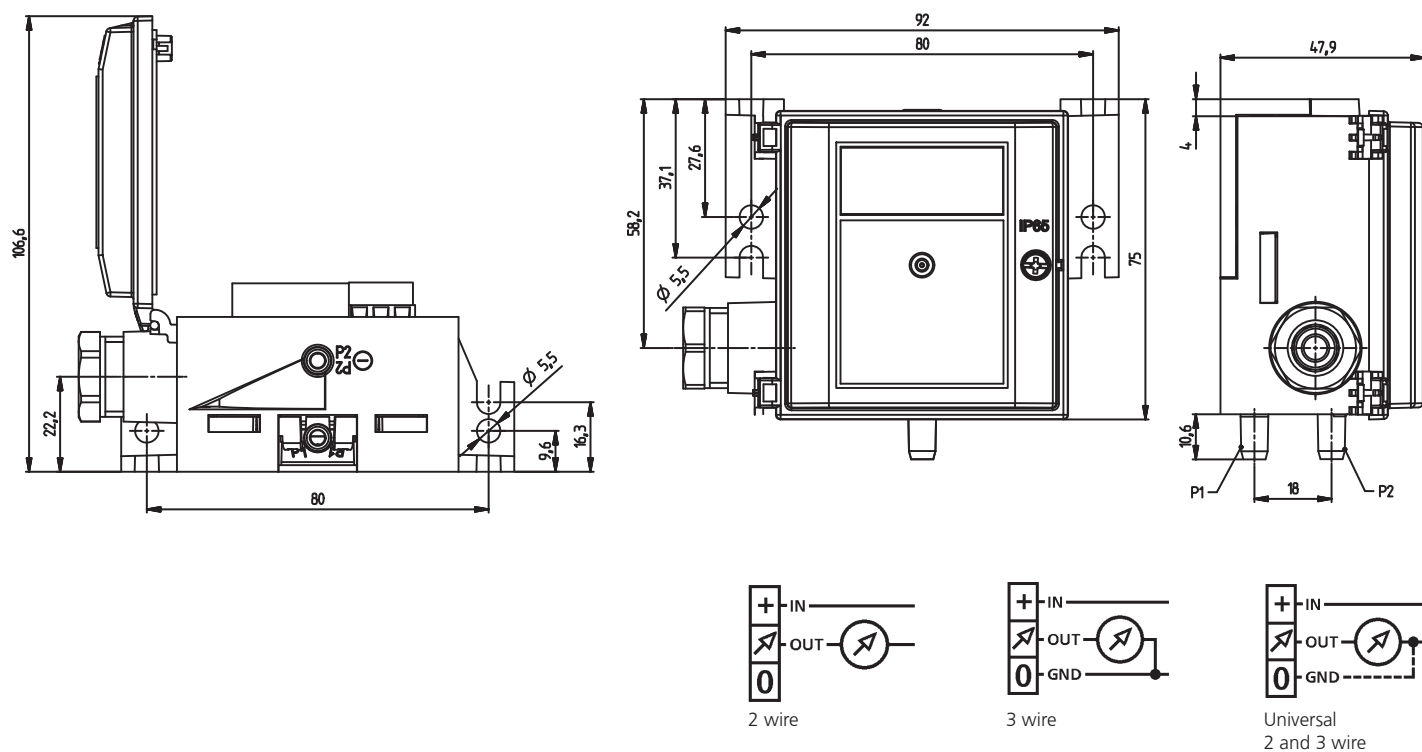

Accessories

Fig. 1

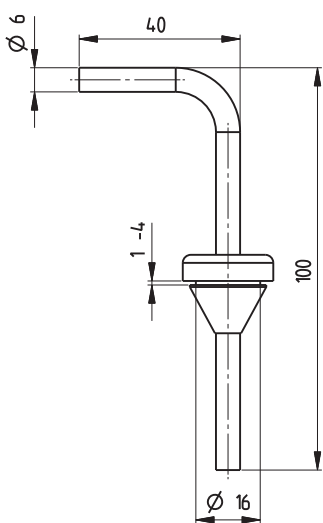


Fig. 2


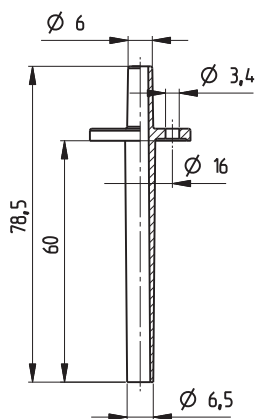


Fig. 3

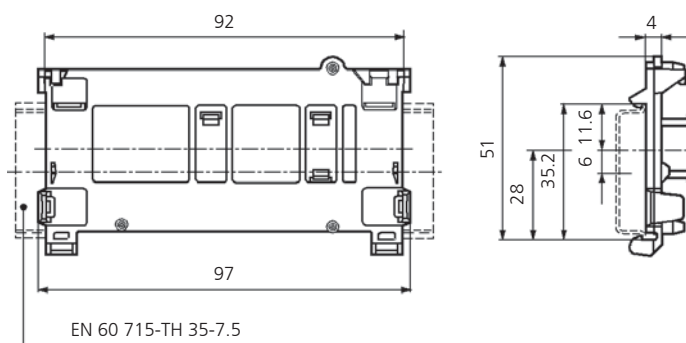

Huba Control AG
Headquarters

Industriestrasse 17
5436 Würenlos
Telefon +41 (0) 56 436 82 00
Telefax +41 (0) 56 436 82 82
info.ch@hubacontrol.com

Huba Control AG
Niederlassung Deutschland

Schlattgrabenstrasse 24
72141 Walddorfhäslach
Telefon +49 (0) 7127 23 93 00
Telefax +49 (0) 7127 23 93 20
info.de@hubacontrol.com

Huba Control SA
Succursale France

Rue Lavoisier
Technopôle Forbach-Sud
57602 Forbach Cedex
Téléphone +33 (0) 387 847 300
Télécopieur +33 (0) 387 847 301
info.fr@hubacontrol.com

Huba Control AG
Vestiging Nederland

Hamseweg 20A
3828 AD Hoogland
Telefoon +31 (0) 33 433 03 66
Telefax +31 (0) 33 433 03 77
info.nl@hubacontrol.com

Huba Control AG
Branch Office United Kingdom

Unit 13 Berkshire House
County Park Business Centre
Shrivenham Road
Swindon Wiltshire SN1 2NR
Phone +44 (0) 1993 776667
Fax +44 (0) 1993 776671
info.uk@hubacontrol.com